

# FRAME\_S

## THE PERFECT FRAMEWORK FOR OPEN OFFICES

FRAME\_S is an intelligent workplace system that serves to give structure to open spaces. It offers its user the privacy of an individual shielded work bay, whilst making it easier to define team areas. Comprising of metal frames and storage elements, FRAME\_S can be combined with Bene desks. The frame is a formative and striking design which


can be heightened further with additional design options and integrated frontal storage. Its characteristic screening design enables the user to create team zones using additional meeting furniture that is directly connected to the personal workspace; the whole space becomes a team zone encouraging communication and cooperation.



**bene**  
INSPIRING OFFICES. SINCE 1790.

## PRODUCT DESCRIPTION


- ① Dividing wall
- ② Tall cabinet lower cabinet
- ③ Tall cabinet upper cabinet
- ④ Frame
- ⑤ Box
- ⑥ Covered side
- ⑦ Cover profile (below organisation profile)
- ⑧ **Table:** Workstation and LEVEL family can be used here. Widths from 1.200 - 1.800 mm.

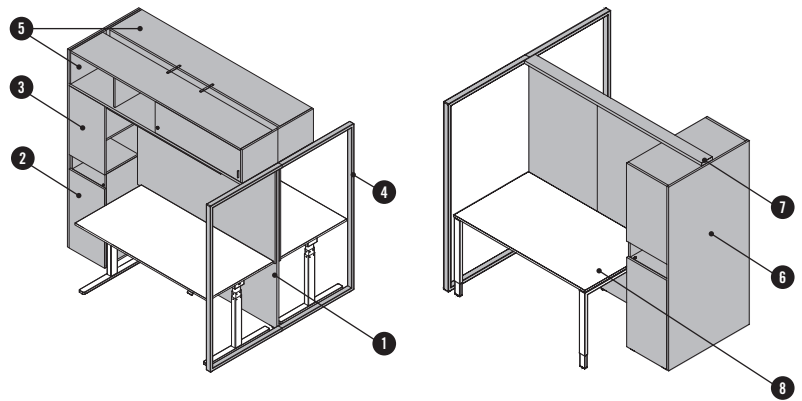


### FRAME

The metal frame is made up of two half sections. There are three different frame section widths available, but all in one height.  
Surface: white, powder-coated


#### Frame variants



H= 1.735 mm W= 1.735 mm




H= 1.735 mm W= 1.297,5 mm




H= 1.735 mm W= 860 mm

### CONFIGURATION OPTIONS/ MODULARITY


#### with box



2 workspaces

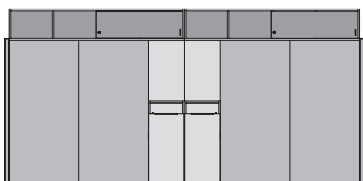

4 workspaces, mirrored

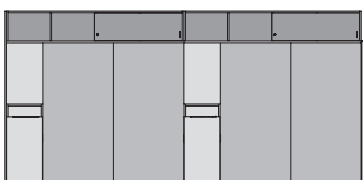


4 workspaces  
arranged in a row


#### without box



2 workspaces

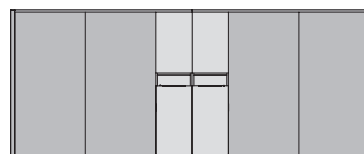



4 workspaces, mirrored

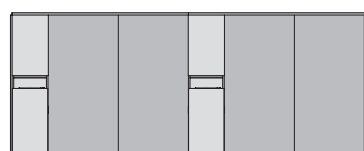



4 workspaces  
arranged in a row

## OVERVIEW & DIMENSIONS



ADJUSTED FOR TABLE WIDTH 1.200 MM

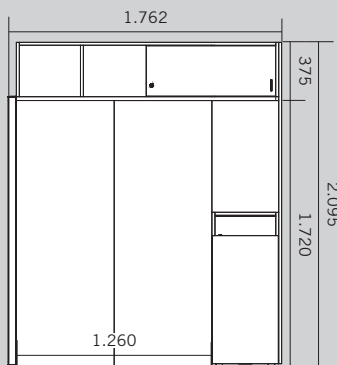



ADJUSTED FOR TABLE WIDTH 1.400 MM

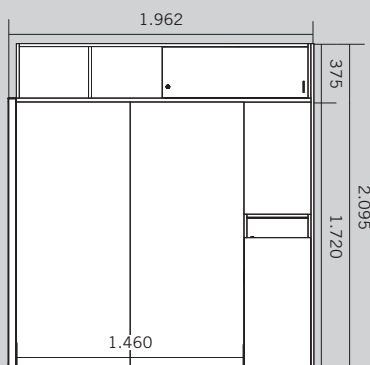

ADJUSTED FOR TABLE WIDTH 1.600 MM

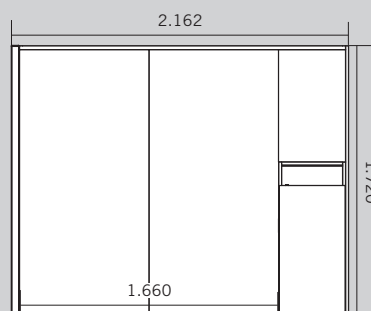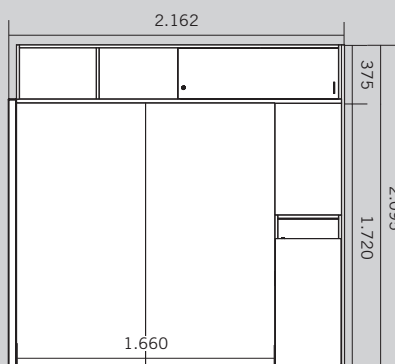

ADJUSTED FOR TABLE WIDTH 1.800 MM

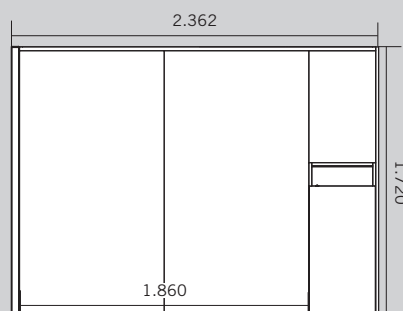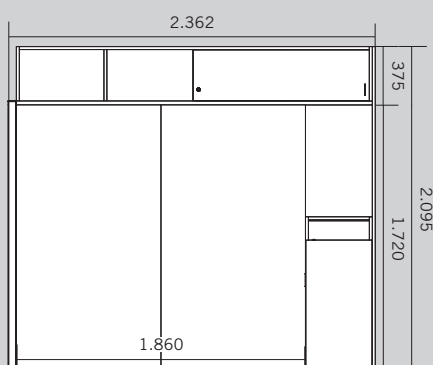


Dimensions in mm

## OPTIONS

### TOP COVER PROFILE (DIVIDING WALL)


The cover neatly hides the profile of settings configured without a top storage box. Material and colour: Aluminium WI white, powder-coated



### FABRIC PANEL

The fabric panel is attached to the organisation profile and can therefore be upgraded easily.

Covers are available in the fabric groups P0-P4, as per Bene seating furniture collection.




### WHITEBOARD

A magnetic whiteboard is available in two different sizes, depending on where it is attached to on the system.

High whiteboard: 1.096 x 856 mm (on covered side)


Low whiteboard: 721 x 856 mm (in front on two tall cabinets)

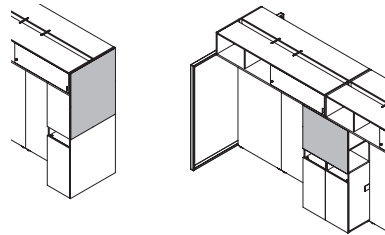

### TALL CABINET LOWER CABINET


#### Accessory tray

An accessory tray can be optionally selected in the lower cabinet of the tall cabinet. Material and colour: Plastic, SZ black

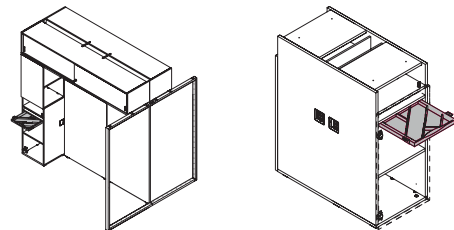


#### Cabling intermediate bottom - connection plug board

A connection plug board can be optionally integrated into the lower half of the tall cabinet. Cabling is neatly channeled out of sight within the structure of the tall cabinet

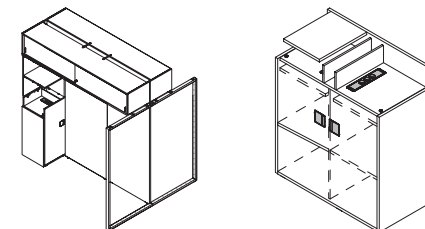

#### Lock

Cylinder lock

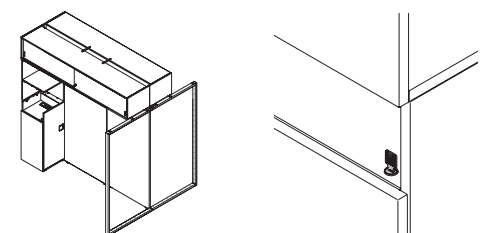


## OPTIONS

### TALL CABINET UPPER CABINET


#### Private compartment

A private compartment can be optionally integrated into the upper half of the tall cabinet. By configuring hinged doors, the cabinet's existing open recesses can be designed to be lockable.

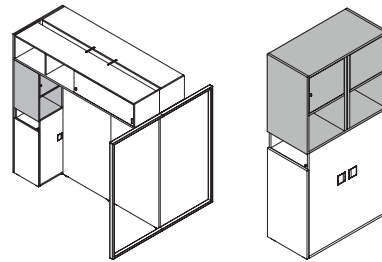

### FLIP CHART - PAD HOLDER

A flip chart - pad holder is available as an additional option; it can be installed either directly on the covered side or can stick magnetically to the FRAME\_S whiteboard.

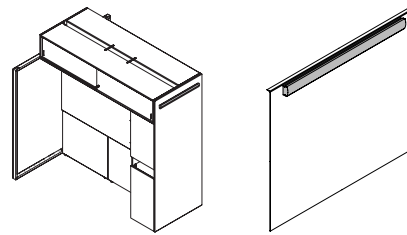

### LIGHTING STRIP

A continuously dimmable light strip, which can be retrofitted under the box, provides uninterrupted lighting at the workplace. There are two models available: (1) with and (2) without a light/motion sensor.


The sensor detects table height and the presence of the user, so the lamp turns on automatically when the user is there and off when he/she leaves. In addition, when installed on electric height-adjustable desks, the sensor automatically dims the light according to the individual distance between the table top and light strip.

The cable is threaded from the light strip through the organisation profile and between the two boxes down through the tall cabinet. There is also space between the two boxes for excess cable lengths, connection plug boards and other elements of cabling.

When FRAME\_S has a table width of 1.200 mm it is not possible to install a light strip under the box.

Description: LED 2 x 2.200 lm, light colour 4.000 °K, system power 25 W, incl. accessories and dimmer, aluminium profile 1.390x40x20 mm, white, powder-coated, power supply unit with GST18 plug, optional starter cable 3.000 mm (country-specific)


Light/Motion sensor detects movement and table height

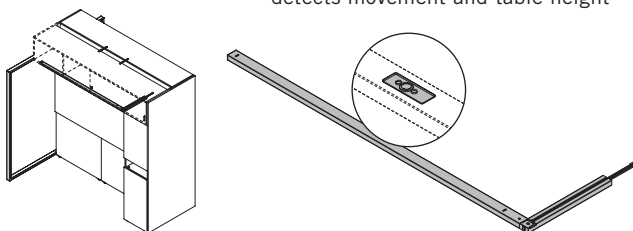

### CABLING OPTIONS

The standard version has already been prepared for FRAME\_S to allow for cabling inside and through the cabinet.

FRAME\_S mirrored

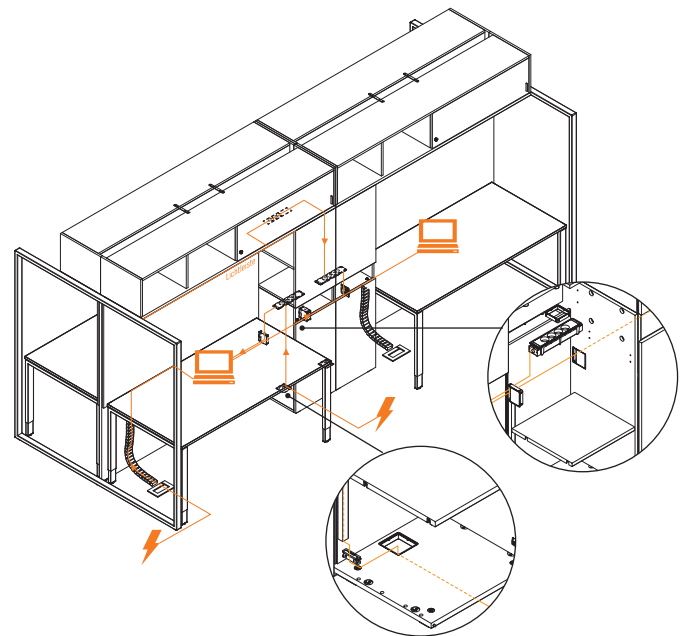


## OPTIONS

### FRAME APPLICATIONS


The frame features rows of shelving holes, which allow the integration of frame applications. A core element here is the railing, an aluminium profile that can be used for organisation and screening. The railing is primarily meant for use in the large frame.

Material and colour: Aluminium W1 white, powder-coated

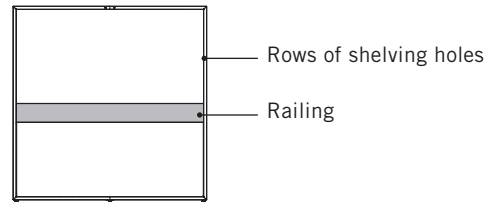


### Partial visual shielding

Partial visual shielding elements can be integrated into the railing in the large frame. This partial visual screening can be made from chipboard (8mm) in basic and décor colours or from perspex (6mm). Perspex can be specified with a white satin finish, or as clear smoked glass.




### Complete visual shielding at bottom

Comparable to the partial visual shielding, a complete visual shielding made of chipboard or perspex is also possible. Chipboard is only available at 25 mm thick. Perspex, in white satin finish or clear smoked glass, is always 6 mm thick.



### Complete visual shielding at top & bottom


Complete visual shielding made of chipboard (8mm) or perspex (6mm) is also possible above the railing - it is advised to combine this with shielding on the bottom half for aesthetic reasons. Here, too, basic and décor colours are available for the chipboard, as well as perspex in a white satin finish or clear smoked glass.




### Decorative elastic cord

A decorative elastic cord can be clamped into holes integrated in the frame, otherwise used for shelving, with small hooks. Three patterns are available for large and mid-sized frames; however, the cord can also be clamped individually. Integration is also possible in small frames.


Version 1




Version 2



Version 3





Wire hooks for rope attachment



### Pleated blind

Temporary and spontaneous shielding towards a hallway or window is possible with a pleated blind that can be integrated into the large frame. On a medium-sized frame the pleating only covers the longer side of the frame.



medium-sized frame

## INSPIRATIONS



Inspiration #01

FRAME\_S setting mirrored with mid-sized frame without box with fabric panel and private compartment.

---



Inspiration #02

FRAME\_S setting mirrored with large frame with box and decorative elastic cord frame application.

## INSPIRATIONS



Inspiration #03

FRAME\_S setting with covered side and integrated screen.




Inspiration #04

FRAME\_S setting mirrored with a mid-sized frame and box plus fabric panel.




## COLOURS & MATERIALS


### MELAMINE: Basic colours




MW white




MQ office white



MC canvas<sup>3</sup>



MP platinum<sup>2,3</sup>



TM clay




MH stone grey



MA aluminium<sup>3</sup>



MS slate<sup>2,3</sup>




MB basalt




MD urban grey

### MELAMINE: Additional basic colours<sup>1,2,3</sup>


### MELAMINE: Decor colours<sup>2,3</sup>



AR maple<sup>1</sup>



BH beech light<sup>1</sup>



NG walnut grey



EZ oak vicenza


### MELAMINE: Decor, wooden texture<sup>1,2,3</sup>



CE elm white



CO coco texture




EA oak aragon

### MELAMINE: Accent colours<sup>1,2,3</sup>



TX mustard



TH marino blue



TS fern green

<sup>1</sup> not available for compact desk top

<sup>2</sup> not available for duo-edge

<sup>3</sup> not available for 3 mm edge, single colour

## COLOURS & MATERIALS



All fabric collections are available as cover: Era, Urban Plus, Xtreme Plus, Inn, Rondo, Step, Step Melange, Patina, Remix, Europost, Mainline Flax, Clara, Divina, Steelcut, Fox, Fiord, Hallingdal, Steelcut Trio, Divina Melange, Divina MD, Greenwich Uni. More information about the specific fabric collections is available at [www.bene.com](http://www.bene.com).

## BENE WORKS SUSTAINABLY

Bene plays a leading role in responsible environmental management. It is practised throughout all company divisions – from product development, procurement, production and logistics to product recycling. Bene considers ecology to be a central element of its responsible and sustainable corporate strategy. Bene sees the legal regulations as minimum requirements and strives for better and more sustainable environmental protection throughout the group. The Bene principle in environmental policy is: **Avoidance – Minimisation – Recycling – Disposal.**

### FRAME\_S - ECOLOGICAL STANDARDS


- 98,4% recyclable
- 36,45% renewable raw materials
- 64,53% use of recycled product materials (30,13% post-consumer, 34,41%, pre-consumer)
- 48,09% use of recycled product materials that comply with LEED (30,13% post-consumer, 35,92%, pre-consumer)
- Resource-conserving product design
- Use of certified wood (chain of custody)
- Use of materials tested for presence of hazardous substances
- No PVC, chromium, lead or mercury used
- Individual parts can be sorted according to homogeneous categories
- Recyclable, with a positive contribution to the carbon footprint (average 1116,85 kg CO<sub>2</sub>)

## FRAME\_S LEED POINTS

Leadership in Energy and Environmental Design (LEED) is a system developed by the U.S. Green Building Council to classify ecological construction. As an internationally recognised standard, LEED sets out numerous guidelines for environmentally friendly, resource-efficient, and sustainable construction. The use of FRAME\_S is an important contribution to LEED certification. The following criteria for this are from "LEED 2009 for Commercial Interiors":

MR Credit 4	Recycling share	up to 2 points
MR Credit 5	Regional materials	up to 2 points
MR Credit 7	Certified wood	up to 1 point
IEQ Credit 4.5	Material with low hazardous substance content	up to 1 point

### FRAME\_S MATERIAL COMPONENTS \*

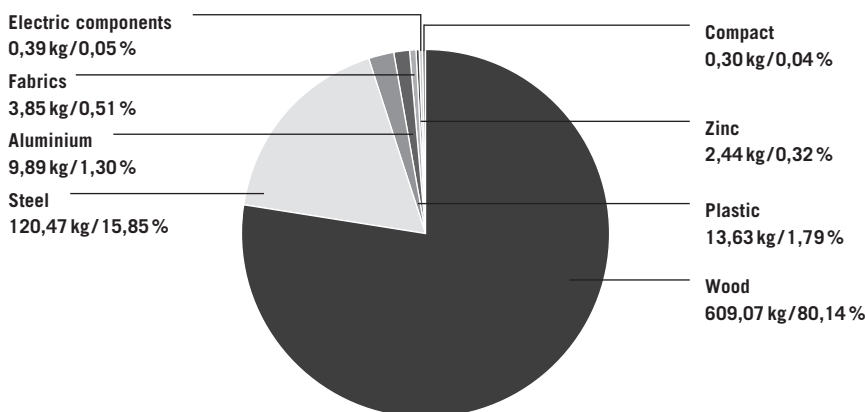

Total weight of reference model: 760,01 kg  
\* Average values in reference to 4 different models.

Environment-related information about Bene: [www.bene.com / sustainability](http://www.bene.com/sustainability)