

TECHNICAL SPECIFICATION

HUSHMEET.S
HUS-BX-017



ELECTRIFICATION

- ❶ LED ceiling light
- ❷ Power module (1 x power, 2 x USB type A, 2 x RJ45).
- ❸ Motion sensor activated lighting and airflow

VENTILATION SYSTEM

- ❹ Air ventilation (motion sensor activated):
 - fans – 4,
 - maximum performance of the single fan – 47 m³/h*,
 - total time of air change inside – 194 seconds*.

EXTERIOR


- ❺ Acoustic laminated glass door 2067 x 824 mm with anodized aluminum latch handle.
Acoustic laminated front side glass panels – 2079 x 553 mm.
- ❻ Acoustic laminated rear side glass panels – clear or frosted – 2079 x 789 mm.
- ❼ 3600 mm cable with 230V grounded plug.
- ❽ Removable base cover provides space for pallet jack access.

INTERIOR

- ❾ Tabletop made of 3-layer melamine chipboard 540 x 770 mm, 25 mm thickness.
- ❿ Replaceable acoustic fabric tiles.
- ⓫ Integral carpeted floor.

* Calculation based on the measured efficiency of one fan, taking into account losses in the ventilation system.

** Calculation based on the volume and capacity of one fan.

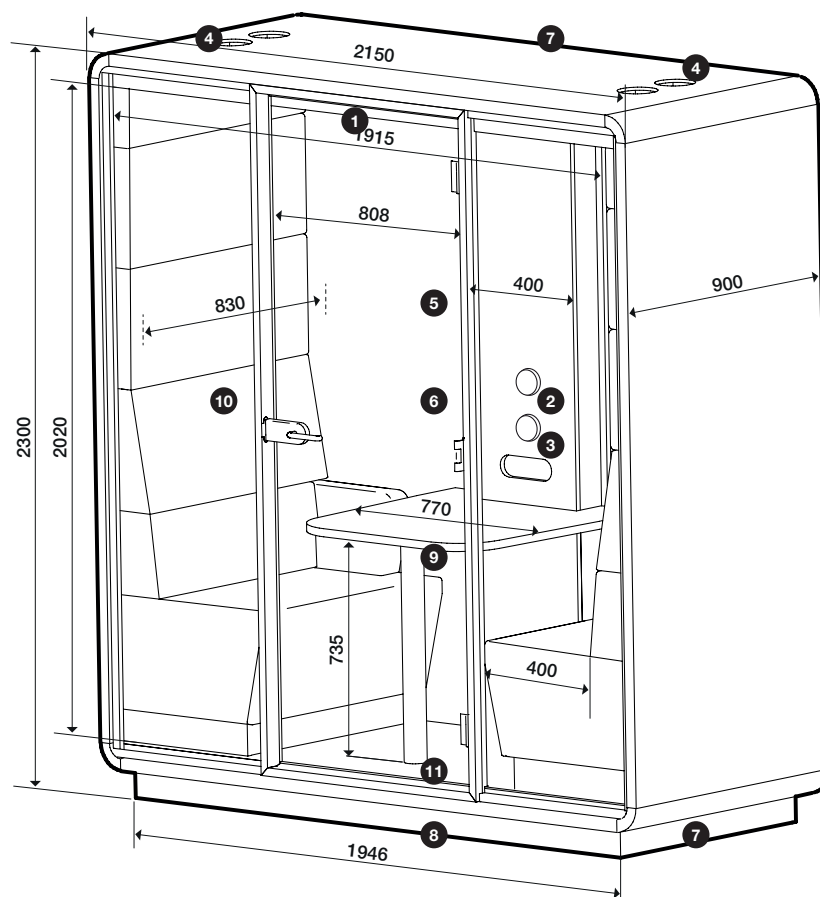

W/H/D: exterior 2150 x 900 x 2300 mm
interior 1915 x 830 x 2020 mm


Weight: 530 kg

Weight with crate: 630 kg



hushoffice

HUSHMEET.S HUS-BX-017

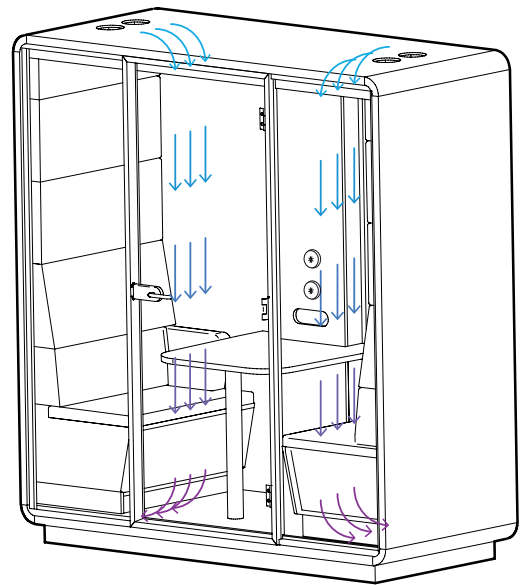

ELECTRICAL SPECIFICATION

POWER MODULE: 1 x Power Socket, 2x USB A, 2 x RJ45.

MAXIMUM POWER CONSUMPTION OF THE PRODUCT: 49,5 W.

CABLE: Length of the cable – 3600 mm. Power cable access from ceiling or base.

LIGHTING POWER: 20 W/1160 lm.

COLOR OF LIGHT: 3000K with adjustable intensity.



MATERIAL SPECIFICATION

EXTERIOR MATERIAL	3 layer honeycomb board, 38 mm thickness, both sides melamine covered, finished with zero-joint edge laser technology		
FRONT AND BACK GLASS PANEL	acoustic, laminated safety glass (RW = 35 dB), also include the thickness 2 x 5 mm glass, acoustic sheet glass, safety manifestation on front		
TABLETOP	tabletop made of 3-layer melamine chipboard, covered with white laminate		
INTERIOR PANELS	high-density LDF (HDF) 3 mm thickness, covered with non-flammable polyurethane foam, upholstered		
UPHOLSTERY	HAITI <ul style="list-style-type: none">weight: 220 g/m²composition: 100%PL,abrasion resistance: 100.000 martindale cycles (EN ISO 12947-2)fastness to rubbing: 5	PETRUS <ul style="list-style-type: none">weight: 389 g/m²sklad: 100%PLabrasion resistance: 80.000 martindale cycles (EN ISO 12947-2)light fastness: 3-4 (EN ISO 105B02)flammability: cigarette and match	WOOL <ul style="list-style-type: none">weight: 325 g/m²sklad: 70%WO, 20%PL, 5%PA, 5%AFabrasion resistance: 100.000 martindale cycles (EN ISO 12947-2)fastness to rubbing: wet 4/5; dry 4/5 (ISO 105-X12)light fastness: 5 (EN ISO 105B02)flammability: cigarette and match (BS-EN 1021-1, 2) (BS 5852-0, 1), CAL 117 (class 1), ASTM 84 (class 1)
FLAME RETARDANT FOAM	<ul style="list-style-type: none">flexible polyurethane compositiontechnology without using any fluorocarbons (freons), nor with volatile organic solvents (eg. methylene chloride)		
DOOR HANDLE AND HINGES	anodized aluminum or aluminum painted in dark gray		
CARPET	for commercial intensive use (designed for Hotel room, Hotel suite, Boutique, Shop, Restaurant, Conference room, High traffic office, Reception, Stairs)		



ACOUSTIC RATING

100 Hz to 3150 Hz sound insulation spectrum for the HushMeet.S BX-017 with a reference curve to determine the sound reduction index (Rw) = 30 dB



SEISMIC ANCHORAGE

All hush products come with Seismic Anchoring capability as standard. Hush products are certified and have been tested in accordance with IBC, ASCE 7-16, ACI 318-14, AISC 360-10. Instructions on how to anchor are available on request.



CERTIFICATION



Warranty



Made in EU



Premium wool
CAL 117



Certificates



SUSTAINABILITY

Hush booths are manufactured in a ISO 9001 and 14001 certified production facility in Poland by Mikomax Smart Office. They are compliant with the ISO 14001 Environmental Management System Standard. Hush is packed and delivered in light cardboard boxes which are recycle-friendly.



hushoffice

mikomax
smart office.



hushoffice.com